



Matriale:

MESSING IHT. EN12164

Produksjonsmetode:

Formstøpt

Tekniske begrensninger:

Arbeidsmiljøtemperatur:

Område: -20~+150°C


Maks trykk: PN25



Funksjoner:

Gjenger i ISO 228-1 standard. (BSP)

f BRØDR.
FREBERG AS

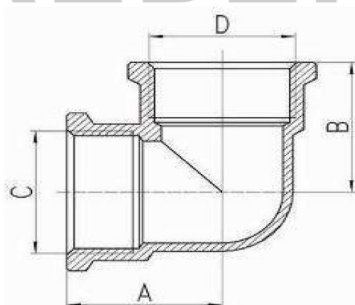

DT			A	B	C	D	GRS
3/8"	340	10	17,5	17,5	3/8"	3/8"	31
1/2"	200	10	22	22	1/2"	1/2"	52
3/4"	110	10	28	28	3/4"	3/4"	90
1"	60	5	32	32	1"	1"	150
1 1/4"	35	5	38	38	1 1/4"	1 1/4"	204
1 1/2"	30	5	40,5	40,5	1 1/2"	1 1/2"	271
2"	36	1	51	51	2"	2"	475
2 1/2"	16	1	67	67	2 1/2"	2 1/2"	935
3"	12	1	77	77	3"	3"	1550
4"	4	1	95	95	4"	4"	2900

Brukes til varmt og kaldt vann, olje, luft, damp, etc.