



Matriale:

MESSING IHT. EN12164

Produksjonsmetode:

Formstøpt

Tekniske begrensninger:

Arbeidsmiljøtemperatur:

Område: -20~+150°C

Maks trykk: PN25




Funksjoner:

Gjenger i ISO 228-1 standard. (BSP)

Brukes til varmt og kaldt vann, olje, luft, damp, etc.

BRØDR.
FREBERG AS

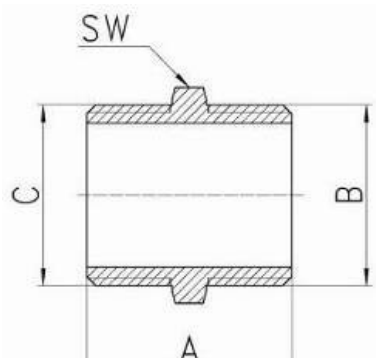

DT		u/bag u/bolsa	A	B	C	SW	GRS
3/8"	700	10	22,5	3/8"	3/8"	18	17
1/2"	400	10	25,5	1/2"	1/2"	23	33
3/4"	240	10	29	3/4"	3/4"	28	44
1"	120	5	31,5	1"	1"	35	69
1 1/4"	75	5	35,5	1 1/4"	1 1/4"	44	113
1 1/2"	60	5	39	1 1/2"	1 1/2"	50	145
2"	96	1	45	2"	2"	62	233
2 1/2"	45	1	58	2 1/2"	2 1/2"	76,5	374
3"	32	1	63	3"	3"	89,5	507
4"	12	1	81	4"	4"	115	920