



Materiale:

MESSING IHT. EN12165

Produksjonsmetode:

Maskinlaget


Tekniske begrensninger:

Kan bli berukt både med veldig høy, eller lave temperaturer.

Funksjoner:

Designet for bruk med PE-rør

f BRØDR.
FREBERG AS

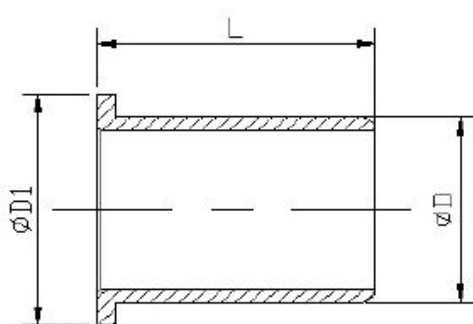

DT			L	ØD	ØD1	Grs
20	250	10	22,0	15,4	19,0	11,0
25	150	10	22,5	20,4	23,0	16,5
32	100	10	31,5	25,8	30,0	27,5
40	50	10	39,0	32,6	38,0	53,0
50	40	10	45,0	40,3	47,0	94,0
63	36	1	53,0	50,7	58,0	158,0

Brukes til varmt og kaldt vann, olje, luft, damp, etc.